


# V 40511 D BCD-zu-7-Segment-Dekoder

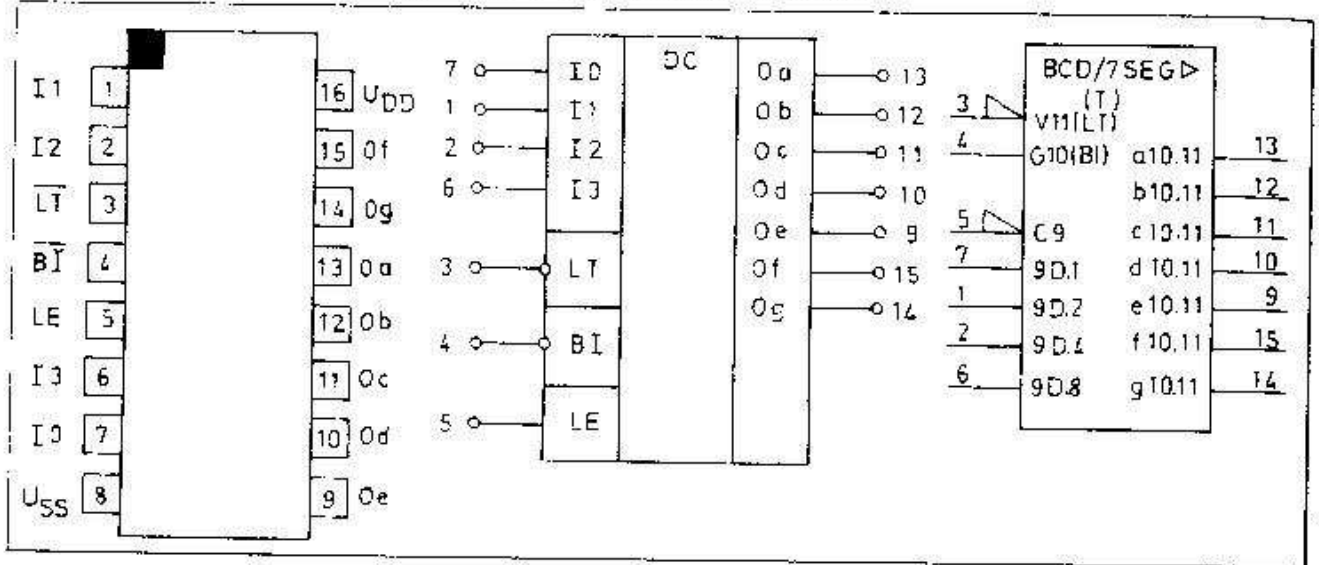

Anschlußbelegung, Schaltzeichen und IEC-Zeichen

Bauform: DIP-16, Plast (Bild 4)  
Typstandard: TGL 38693

## Funktionstabelle

LE	$\overline{BI}$	$\overline{LT}$	I3	I2	I1	I0	Oa	Ob	Oc	Od	Oe	Of	Og	Display
X	X	L	X	X	X	X	H	H	H	H	H	H	H	6
X	L	H	X	X	X	X	L	L	L	L	L	L	L	aus
L	H	H	L	L	L	L	H	H	H	H	H	H	L	]
L	H	H	L	L	L	H	L	H	H	L	L	L	L	
L	H	H	L	L	H	L	H	H	L	H	H	L	H	2
L	H	H	L	L	H	H	H	H	H	L	L	H	H	3
L	H	H	L	H	L	L	L	H	H	L	L	H	H	4
L	H	H	L	H	L	H	H	L	H	H	H	H	H	5
L	H	H	L	H	H	L	H	L	H	H	H	H	H	6
L	H	H	L	H	H	H	H	H	L	L	L	L	L	7
L	H	H	H	L	L	L	H	H	H	H	H	H	H	8
L	H	H	H	L	L	H	H	H	H	L	H	H	H	9
L	H	H	H	L	H	L	H	H	L	H	H	H	H	A
L	H	H	H	L	H	H	L	L	H	H	H	H	H	B
L	H	H	H	H	L	L	H	L	L	H	H	H	L	C
L	H	H	H	H	L	H	L	H	H	L	L	H	H	d
L	H	H	H	H	H	L	H	L	L	H	H	H	H	e
L	H	H	H	H	H	H	H	L	L	H	H	H	H	F
H	H	H	X	X	X	X	-	+	+	+	-	+	*	*

(X = L oder H;

- abhängig von der bei L/H-Flanke an LE anliegenden Eingangsbelegung an I0...I3)

